

Logger DrinkLOG




Measure the temperature in your bottles and cans

°C
°F

Compatible with pasteurisation tunnel and retort

Strong miniaturization and fast response time

Pressure resistant temperature logger

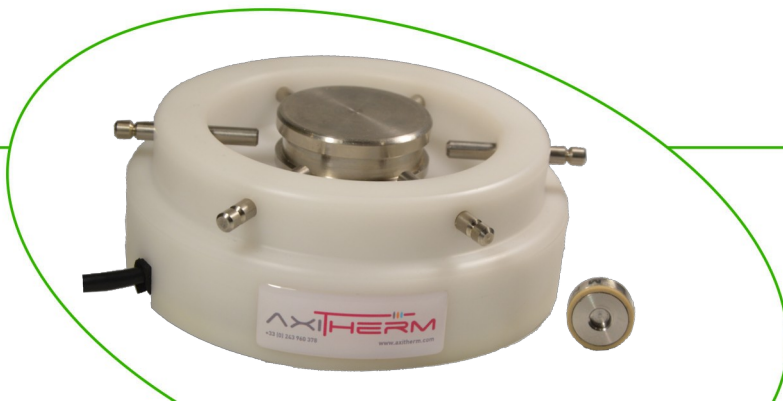

Logger DrinkLOG



Measure the temperature in your bottles and cans

Specificities

- Meets direct food** contact standards
- Compatible** with all our mounts
- Usable in any** type of packaging
- Fully** maintenance free
- 3 to 5 years lifetime** upon the frequency of use

Applications

- Pasteurization and sterilization** of liquid or solid food products
- Accurate PU / Fo** in all packaging over 80 g
- Control of** pasteurization tunnel and retort
- Optimization** of thermal process construction
- Works with **AXITHERM** communication interfaces and softwares

Performances

- Environment** temperature measurement without disturbance
- Weight** of 5,6 g for a volume of 2,0 cm³
- 3 temperature ranges** to meet all your requirements:
-40 to +85°C / 0 to +125 °C / +15 to +140 °C
- High miniaturization** Ø 16.6 x 9,5 mm
- Accuracy better** than ± 0.15 ° C
- Wartertightness:** IP 68 from -1 to +15 bar
- Memory capacity:** 4096 data
- 3 recording modes:** immediate - date / time - temperature thresholds
- Fast reponse time** (acquisition speed = every 15 s or more)



AXITHERM SARL

35 FONTEVRAULT STREET - 72200 LA FLÈCHE - FRANCE

Phone : +33 243 960 378

Email : contact@axitherm.com - www.axitherm.com

capital of 15245€, RCS of LE MANS 44100455300026 – code APE 8299 Z

N° VAT FR 19 441 004 553

